

Pulse meter



[Datasheet](#)




Monitor your consumption using this sensor, which can be adapted to all your meters with a pulse output (electric, water, gas, etc.).

FLEXIBLE MEASURES

Choose the uplink interval that suits your needs.

HISTORISATION DES DONNÉES

Don't lose any data thanks to a record of the last 4 values.

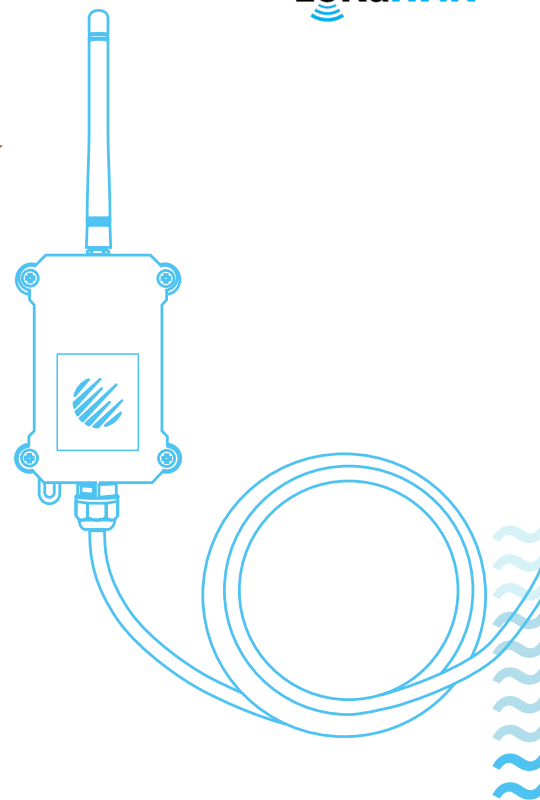

Pulse meter

Range	0 to 4,294,967,295 pulse	Resolution	1 pulse	Accuracy	±3% or ±1 pulse
-------	--------------------------	------------	---------	----------	-----------------

Wireless transmission

Technology	LoRaWAN v1.0.3	Radio frequency	EU868 MHz
Transmission power	25 mW (14 dBm)	Sensitivity	Up to -148 dBm
Uplink frequency	Configurable from 1 minute		

Power supply

Voltage	2.1V ~ 3.6V	Battery technology	Li / SOCl2
Capacity	4000 mAh	Power consumption	0.1 mA with an uplink interval of 10 minutes
Battery lifetime	Up to 4 years with an uplink interval of 10 minutes		